

HD REEL ROLLER PLATFORM

RRP - HDRR5

Tough Structural Steel Frame and Front Roller Locks to Ease Reel Removal. Side Rollers are Included. Low Base Design to Avoid Damaging of Cable Inside Reel. Rugged Steel "Angle" Construction with Steel Plate Ramp.


Standard Features

- Front Roller Lock for Ease of Reel Removal
- Side Roller Bearings to Prevent Reel Flange Chafing
- Raised Rear Roller to Help Secure the Reel in Place
- Adjustable Roller to Handle Reels from 24" to 60" Diameter



Standard Sizes Available:

- 280S - 28" Wide X 2,000 LBS
- 300S - 30" Wide X 2,000 LBS
- 360S - 36" Wide X 2,000 LBS
- 480DW HD - 48" Wide X 2000 LBS (Per Side)
- 600 - Adjustable Width X 3,000 LBS

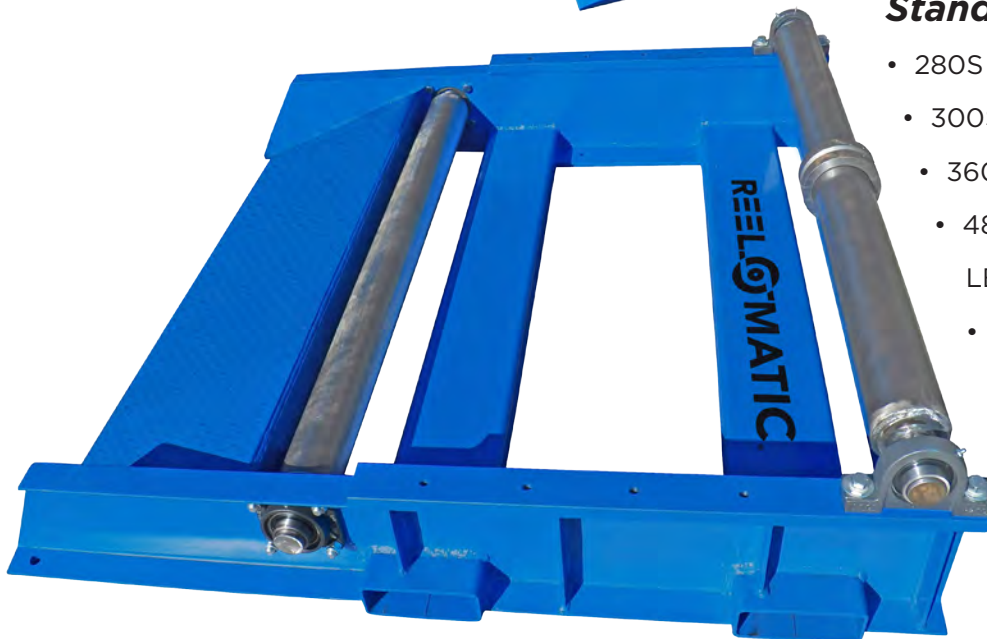

HDRR5 shown Above

REELOMATIC

The Leader in Reeling, Coiling & Processing Solutions

6408 S. Eastern Avenue | Oklahoma City, OK. 73149
405.672.0000 | 405.672.7200 Fax
www.reelomatic.com