

RE-REEVER

LEADING THE WAY IN RE-REEVING EQUIPMENT

**When replacing the wire rope on your cranes,
“You’ll believe it when you Re-Reeve it!”**

Standard “Re-Reeving Machine” Features:

- Fork Lift Base & Lift Eyes
- Diesel/Gasoline Engine Powered Hydraulic System
- Hand Operated Pressure Relief Valve to Adjust Torque
- Manual Hand Valve for Speed & Direction Control
- Slide Coupling Disconnect for Easy Loading and “Free Wheel” Capacity
- Lifting Bars
- Customized Torque and Reel Dimensions
- Shaftless Models Available for Weight Capacities Exceeding 100,000 LBs.



REELOMATIC®

The Leader in Reeling, Coiling & Processing Solutions

6408 S. Eastern Avenue | Oklahoma City, OK. 73149
405.672.0000 | 405.672.7200 Fax
www.reelomatic.com

RE-REEVER

LEADING THE WAY IN RE-REEVING EQUIPMENT



Standard Reel Capacities:

RR5 - up to 60" Diameter

x up to 48" wide
x up to 5,000 lbs.

RR10 - up to 96" Diameter

x up to 60" wide
x up to 10,000 lbs.

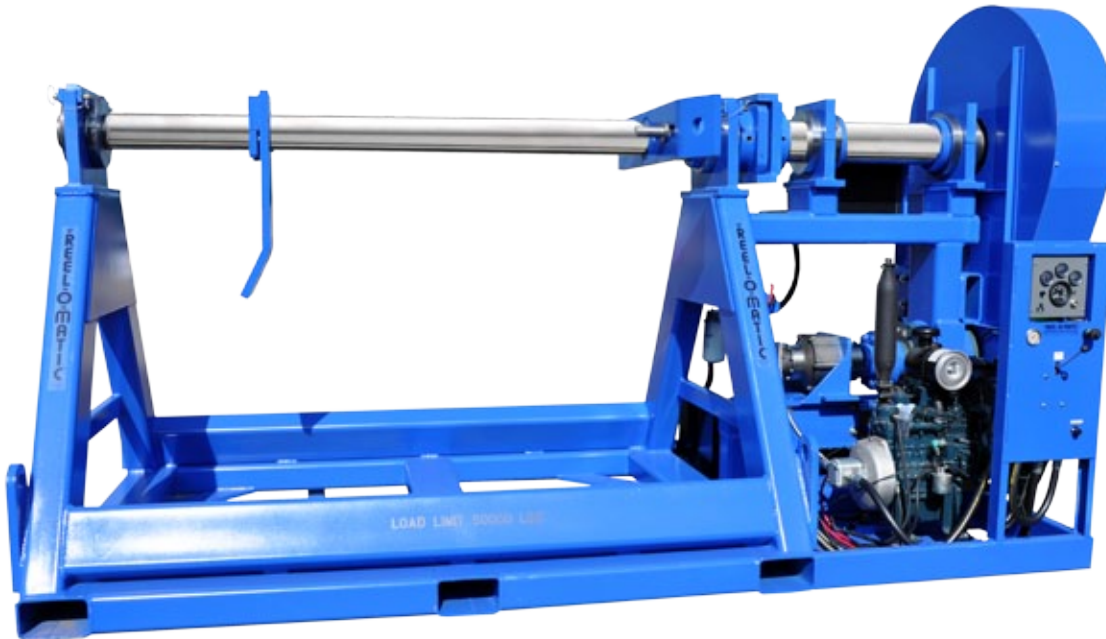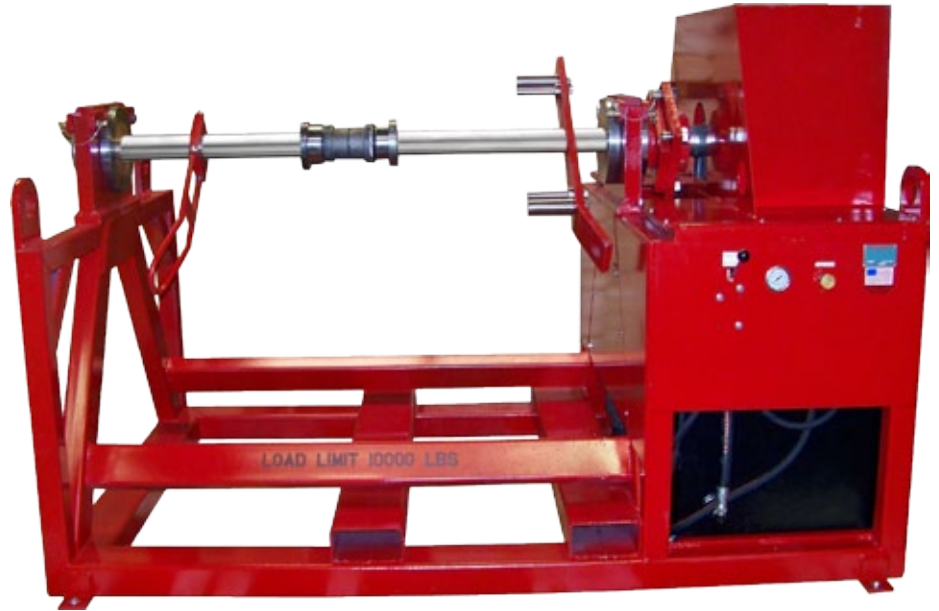

The Re-Reever

Reel-O-Matic's Re-Reeving machinery provides tension controlled pay-out and re-spooling for boom hoist and main lift line applications. The Re-Reeving Series is available with customized torque capabilities and reel dimensions per customer required specs. Various self contained systems are available.

REEL-O-MATIC

The Leader in Reeling, Coiling & Processing Solutions

6408 S. Eastern Avenue | Oklahoma City, OK. 73149
405.672.0000 | 405.672.7200 Fax
www.reelomatic.com