


REEL UPENDER

Reel Upender (“Flipper”)

Reel Machinery for Safely and Efficiently “Flipping” Your Reels
Back and Forth from Horizontal to Vertical Axis.

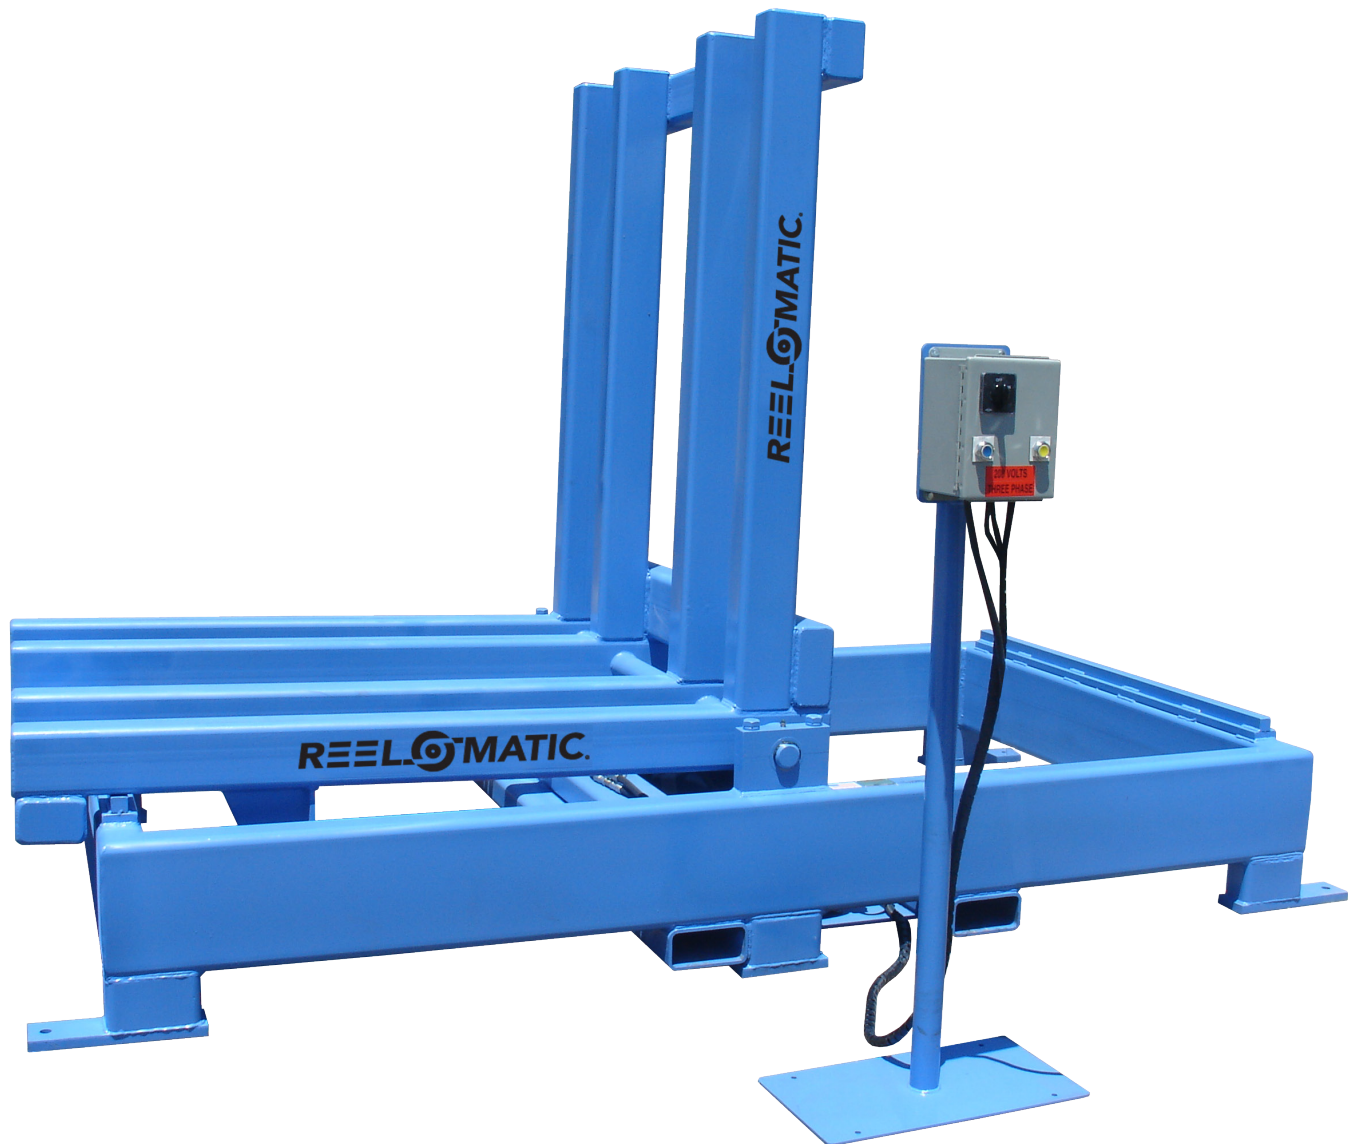

Model RU10

REELOMATIC[®]

The Leader in Reeling, Coiling & Processing Solutions

6408 S. Eastern Avenue | Oklahoma City, OK. 73149
405.672.0000 | 405.672.7200 Fax
www.reelomatic.com

REEL UPENDER

Reel Upender (“Flipper”)

Standard Features

- Heavy Duty Structural Steel Main Frame Construction with Bolt Down Flanges.
- Rectangular Tubed Platform, with Forklift Access Ports for Transporting.
- Electric/Hydraulic Powered Reel Rotation.
- Integrally Mounted Operator Control Panel and Pendant.



**RU10 Special for Reels
96" x 60" wide**



Custom Designed RU10

Reel Upender (“Flipper”)

	Weight	Reel Diameter	Reel Width
RU-5	5,000Lb.	24" - 72"	12" - 48"
RU-10	10,000Lb.	24" - 96"	12" - 60"
RU-15	15,000Lb.	24" - 108"	24" - 74"
RU-20	20,000Lb.	24" - 120"	24" - 84"
RU-25	25,000Lb.	36" - 144"	24" - 84"