

# WIRE INSULATION TESTER

## WIT 101 High Speed Re-Spooler

The Wire Insulation Tester (WIT) is powered by a 1 HP variable Speed drive system providing speeds up to 1,000 ft. per minute. Tension is electronically adjustable. The machine automatically stops when a fault is detected. A levelwind system is a standard integral part of the take-up portion of the WIT 101..



Shown Above is the WIT 101 with Pay-Off Electrolift and Loading Cart,  
Clinton Spark Tester and Automatic Take-up Levelwind.

**REELOMATIC**

The Leader in Reeling, Coiling & Processing Solutions

6408 S. Eastern Avenue | Oklahoma City, OK. 73149  
405.672.0000 | 405.672.7200 Fax  
www.reelomatic.com

# WIRE INSULATION TESTER

## WIT 101 High Speed Re-Spooler

### **Standard Features**

- Wire sizes 30 gauge up to 3/8" OD
- Speed : 0 to 1,000 FPM
- Spool Sizes: 6" OD to 24" OD
- Automatic Levelwind
- Predetermined Stop-to-Length Counter
- 120 V 1 Phase power required

### **Options**


- High frequency insulation tester
- Spark Tester
- FPM Indicator
- Electronic Stop-to-Length Counter
- Larger Capacities Available
- Wire Diameter Measurement
- Material Marking System
- Auto Reverse to fault Feature
- Electrolifts with Loading Carts



**Cantilevered Shafts**



**Clinton Spark Tester**

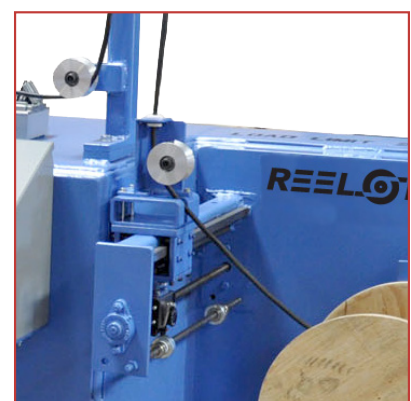

**Automatic Take-Up Levelwind**

**REELOMATIC**

The Leader in Reeling, Coiling & Processing Solutions

6408 S. Eastern Avenue | Oklahoma City, OK. 73149  
405.672.0000 | 405.672.7200 Fax  
www.reelomatic.com